



SA10/ESP Therm Patented MasterSan™

Flexible hose produced with exclusive technology by TECNICA SRL made of:

- Addivated polyolefin resins film with anti-bacterial and anti-mildew master.
- Thermo-insulating coating in netted and closed-cell of polyethylene foam.
- External protection in addivated polyolefin resins film.
- Embedded steel wire helix.
- Thermo-insulating covering in polyester fibre (th. 25mm-16kg/m³).
- Outer aluminized polyolefin film protection (flame retardant).

The assembly of materials for the construction of the flexible conduit does not require the use of chemical agents, glues or adhesives.

Insulation: 25mm / 16kg/m³ - standard

50mm / 16kg/m³ - on request

Thermal resistivity at 20°C **R = 0,66m² K/W (UNI EN 12664:2002)**

MasterSan™
in collaboration with:




TECHNICAL SPECIFICATIONS AND USAGE LIMIT						
COLOR	LENGTH	WORKING TEMPERATURE	PRODUCTION DIAMETERS	AIR SPEED	PRESSURE	CURVATURE RADIUS
Grey	10m standard	-20° + 90°C (peak +115°C)	from 70mm to 254mm	max 20m/sec	max 200 mmH ₂ O	1,2 - 1,8 x Ø

PRODUCTION DIAMETERS														
70*	76*	80	90*	102	127	152	160	165	180	203	254			

*Diameters available on request
Diameters other than those indicated are available by prior feasibility check.

PRESSURE DROPS DIAGRAM (Air Temperature 20°C)

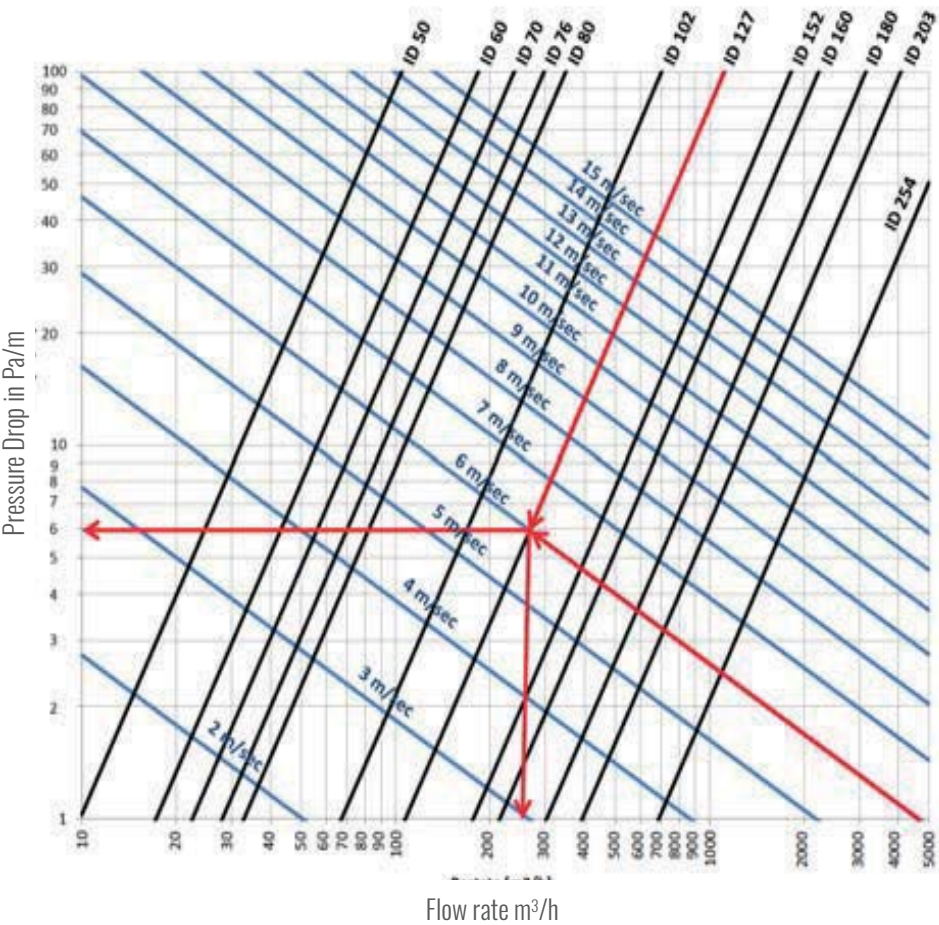

PRESSURE DROPS TABLE WITH CALCULATION EXAMPLES

To calculate the flow rates and pressure drops of the other diameters, use the beside diagram.

DIAMETER	AIR SPEED 8m/s		AIR SPEED 10m/s	
	WORKING PRESSURE [bar]	WORKING VACUUM [bar]	CURVATURE RADIUS [mm]	WEIGHT [gr/m]
70	0,6	0,13	49	128
80	0,5	0,09	56	154
102	0,4	0,08	70	200
127	0,4	0,07	92	254
152	0,2	0,05	105	308
160	0,15	0,05	110	331
180	0,15	0,05	130	438
203	0,15	0,04	140	492
254	0,08	0,03	175	600

CERTIFICATIONS		
SANITIZATION	FIRE REACTION	
certified by Sanitized® 10 P.O. Box 1468 3801 Biadene Italy Tel. +39 024 627 18 18 Fax +39 024 627 18 19 www.sanitized.com Count tests: JIS L 1902 Testing the antibacterial activity and efficacy on textile products Colony / Year: Japan 2002 Test time: 7 days, 4 days pre-treatment incubation Field of application: Hydrophilic materials like textiles, (rugs, carpets, linens) Sample size: Test specimen with 0.4 g in a diversified determination Scope: The method is applied for the quantitative determination of the antibacterial effectiveness of non-diffusible active substances. Abstract: Specimens are contaminated with a standard number of a given micro-organism (inoculum). After incubation for 18 hours by 37°C, the micro-organisms on the test material are washed off with a defined amount medium. The number of colony-forming units (CFU) is determined and expressed logarithmically. From this number the antimicrobial effect can be calculated. Test organism: Evaluation is based on the difference in bacteria count (in terms of CFU) between zero and 18 hour contact with the test material. Germ reduction "Bacteriostatic Activity (B)" is given as logarithmic and proportional values. Test Organisms: Staphylococcus aureus ATCC 6038 Escherichia coli ATCC 11229 Klebsiella pneumoniae ATCC 4352 Explanation of the bacteriostatic activity: 0.0%: germ growth, insufficient antibacterial effect 0.1% to <50%: no significant germ reduction, insufficient antibacterial effect >50%: Significant germ reduction, good antimicrobial effect. Sanitized Protection NO BACTERIA NO MILDEW	EU	Vapor barrier: class B-s1, d0 (EN 13823:2010) Inner tube and Thermal insulation: class B-s2, d0 (EN 13501-1:2009)

GREEN BUILDING

Thanks also to the support of GreenMap, products manufactured by Tecnica srl contribute to obtain the credits of the major international rating systems for sustainable buildings:



LEED

Contributes to credits:
IP, EA, MR



WELL

Contributes to credits:
MATERIALS, COMMUNITY



BREEAM

Contributes to credits:
MAN, ENE, WST

For further details regarding the specific contributions to the credits indicated, contact Tecnica Srl

APPLICATIONS								
OEM	Residential	Smooth surface	Flexibility	Easy Pack	Self-extinguishing	Mold Resistant	Microorganism Resistant	Tear Resistant
Calibrated Diameters*	REACH Certifie	RoHS Certifie	Halogen Free	Building	Transport	Air Conditioning	CMV	Non-magnetic*
Wall Trace	CMV transport means	CMV mech. means	Prolonged anti condensation	Recreational Boats				

*on request

WIRE OPTIONS	ADDITIVE OPTIONS	SERVICE OPTIONS
AM non-magnetic inox wire	UV * anti UV	MP customized marking

*on request



Efficient Indoor Air Project


TECNICA srl – Via degli Intarsiatori Rolesi 1 – 42047 Rolo (RE) tel.+39 0522 665129
fax. +39 0522 650211 www.tecnicasrl.it - info@tecnicasrl.it ALL RIGHT RESERVED © 2020 Rev.4

25

TESTS PERFORMED		
TEST	METHOD	OUTCOMES
λ Coefficient o thermal conductivity	UNI EN 12664:2002	T = 0°C - 0,039 W/mK
		T = 10°C - 0,042 W/mK
		T = 30°C - 0,046 W/mK
		T = 60°C - 0,054 W/mK
Resistance to aggression by chemical agents	Test performed on non-insulated SA10/ESP duct - Application on the external surface of the specific chemical agent and check for any changes after 48h.	ETHANOL No modification and/or damag
		AMMONIA No modification and/or damag
		HIGH CONC. DEGREASER No modification and/or damag
		COOLANT FLUID No modification and/or damag
Maximum operating temperature peak	Test performed on non-insulated SA10/ESP duct - Identification of the maximum temperature peak bearable by the duct and all its components.	+115°C no longer than 2min.
Example of use limits in order to avoid the risk of condensation on the external wall	Option 1 Duct Ø 102	Flow rate temperature 5°C Room temperature 45°C Room relative humidity 90%
	Option 2 Duct Ø 102	Flow rate temperature 0°C Room temperature 40°C Room relative humidity 90%
Duct airtightness class	Test performed on non-insulated SA10/ESP duct - EN 12237 - EN 1507 - EN 12599	Class D
	Test performed on non-insulated SA10/ESP duct - EN 13180	Compliant

INSTALLATION FEATURES

T-EspTM

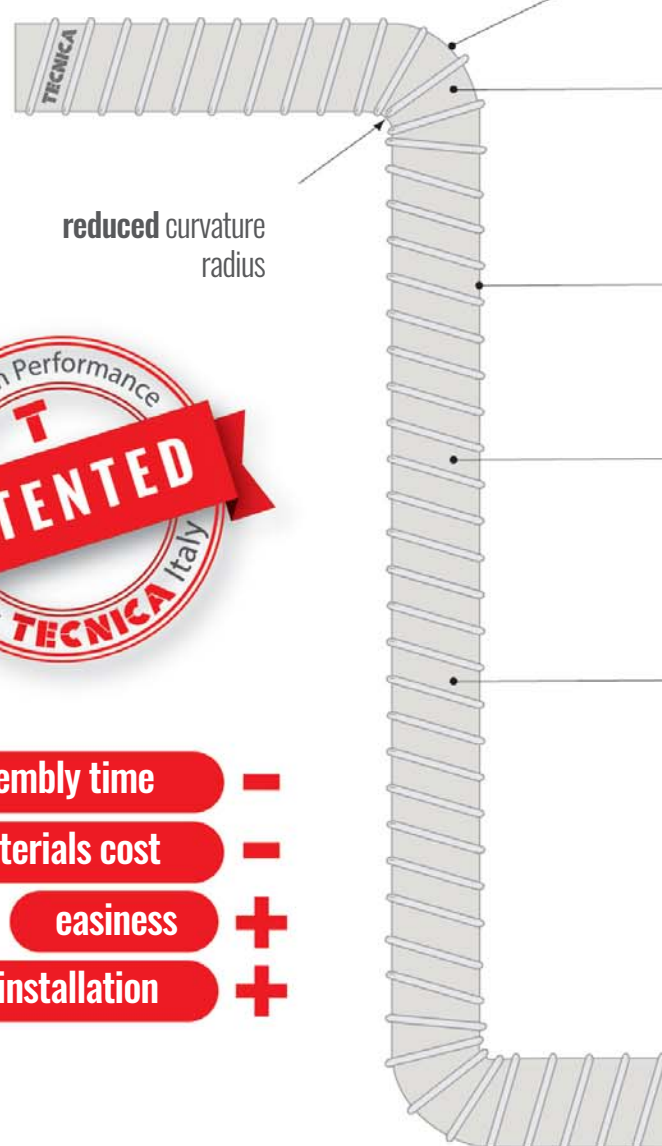

assembly time -

materials cost -

easiness +

quick installation +


No limitation to degrees of curvature on the products

Reduced pressure drop as the internal section remains unchanged even in the points of curvature

Single wall in netted closed cell of expanded polyethylene foam (R-value 0,66 m²K/W)


Lightness and self-supporting thanks to the reinforced structure with a spiral steel wire that also allows the internal section to remain unchanged at the points of curvature

Prevents the formation of mold and the proliferation of bacteria and viruses inside the air ducting systems thanks to the TecnicaTM polyolefin film with the addition of **Sanitized^R** technology

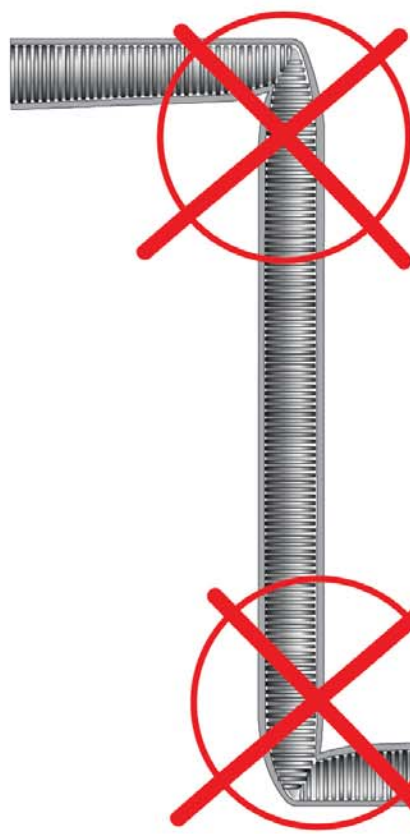

no risk of crushing in curves with tight radius

corrugated ducts

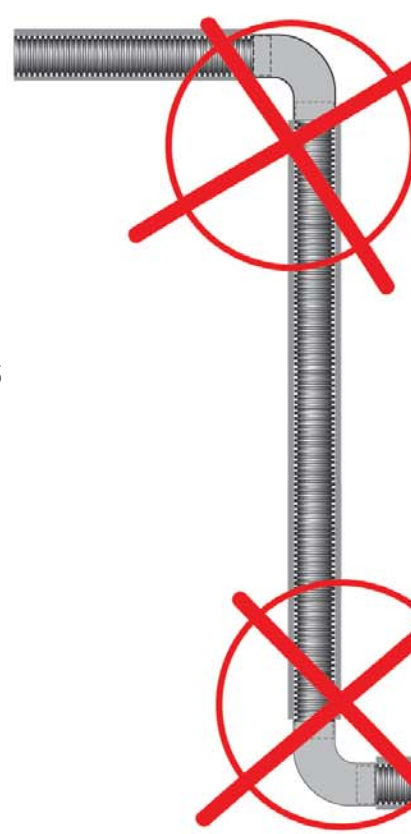

no connection systems or special pieces are required in the curves