



HOSE CLAMPS

Hose clamp in flame retardant polyamide, carbon-black loaded, resistant to saltiness and UV rays.

CHARACTERISTICS:

COLOR: Black

BELT WIDTH:

- 7,8 mm - max. tightening $\varnothing$ 200 mm
- 9,8 mm - max. tightening $\varnothing$ 233 mm



HOSE CLAMPS WITH BALANCING HEAD

Hose clamp in steel with balancing head with a new carriage that allows to operate on hoses already fitted and in areas difficult to access to. 9mm belt, steel carriage and screw.

CHARACTERISTICS:

- ART. 36 - INOX steel belts and galvanized steel heads.
- ART. 16 - INOX steel clamps




SPIRAL HOSE CLAMPS

Spiral hose clamps in steel with balancing head. It guarantees tightening also on hoses with particularly accentuated spiral profile.

CHARACTERISTICS:

- ART. 46 - INOX steel belts, galvanized steel spiral clamp and head



Cod. AN
counterclockwise

Cod. OR
clockwise



JOINT COUPLING NP

Male coupling (length 120mm) in galvanized plate for hoses connection.

CHARACTERISTICS:


- Plate thickness 0.6 mm for hoses from $\varnothing$ 80 mm to $\varnothing$ 300 mm
- Plate thickness 0.7 mm for hoses from $\varnothing$ 315 mm to $\varnothing$ 600 mm



FLANGED COUPLING

Male flanged coupling in galvanized steel plate for flexible hoses ending.

CHARACTERISTICS:
Length 40 mm

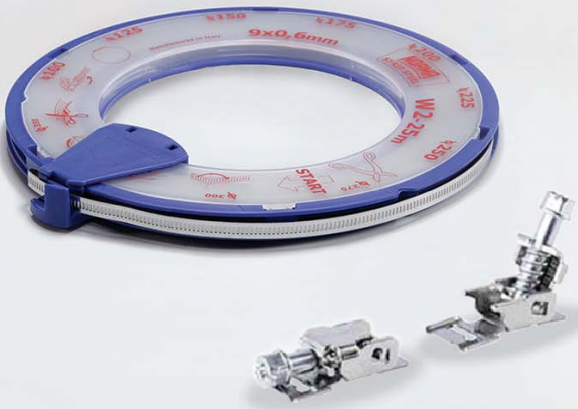

PRATIKIT INOX

Perfect for the realization, in an easy and fast way, of clamps with different diameters, depending on the needs.

CHARACTERISTICS:
Art. 36 • Perforated belt in INOX 430 steel, width 9mm, length 25m.
 • Balancing carriage in INOX 430 steel, width 9mm, pack of 50 pieces.



RELEASE CLAMP S96

Single clamp made of a PVC profile, galvanized steel cord and fast lock..

CHARACTERISTICS:
Produced in diameters:
150* – 200* – 250* – 305 – 406 – 508 – 610 – 700* - 810*

* diameters on request